

*Always verify tips or orifices you received are the size which you require before using with chemical. Chemical rates need to be obtained from your chemical dealer.

Turbo TeeJet® Induction Flat Spray Tips



TURBO TEEJET INDUCTION

Typical Applications:

Extremely coarse droplet size provides the best drift control possible and is ideal for soil applied and post-emerge systemic products, including dicamba.

Features:


- 110° wide angle, air induction, tapered flat spray tip pattern based on the patented outlet orifice design of the original Turbo TeeJet® nozzle.
- Patented orifice design provides large, round passages to minimize plugging.
- Depending on the chemical, produces large air-filled drops through a Venturi air aspirator resulting in less drift.
- All polymer construction for excellent chemical and wear resistance.
- Compact size to prevent tip damage.
- Removable pre-orifice.
- Ideal for use with automatic sprayer controllers.
- Wide operating pressure range: 15-100 PSI.
- Automatic spray alignment with 25598*-NYR or 11443*-CELR Quick TeeJet cap and gasket for capacities 015 thru 06.
- Automatic spray alignment with 98579-1-NYR or 114502*-CELR Quick TeeJet cap and gasket for capacities 08 and 10.

PART NO.	LIST PRICE
SIZES 01-06	
TTI1100##-VP (01-06).....	\$13.47
TTI1100##-VP-C (01-06).....	\$15.39
REQUIRED CAP	
25598*-NYR(current style).....	\$1.41
114443*-NYR(new style).....	\$1.41
SIZES 08-10	
TTI1100##-VP (08-10).....	\$15.75
TTI1100##-VP-CE (08-10).....	\$18.38
REQUIRED CAP	
98579-1-NYR(current style).....	\$2.34
114502*-CELR(new style).....	\$2.34

CATALOG IS LIST PRICE PLEASE APPLY DISCOUNT



NOTE TeeJet will begin transitioning to a "new" cap lineup. Old style caps are still available and will ship until current inventory is gone.
 # - Specify Tip Size - C / CE - Includes Quick TeeJet Cap & Gasket
 * - Specify Cap Color





TTI1100##-VP Spray Tip (Cross Section View)
 Note: Due to pre-orifice design, this tip is not compatible with the 4193A check valve tip strainer.



TTI11004-VP is the recommended nozzle to use with ROUNDUP READY® XTEND & XTEND MAX

NOZZLE	PSI	DROPS PER MIN	CAPACITY ONE NOZZLE IN GPM	CAPACITY ONE NOZZLE IN OZ./MIN.	GPA										GALLONS PER 1000 SQ. FT.			
					20"													
					4 MPH	5 MPH	6 MPH	8 MPH	10 MPH	12 MPH	15 MPH	20 MPH	2 MPH	3 MPH	4 MPH	5 MPH		
TTI110015 (100)	15 UC	0.092	12	6.8	5.5	4.6	3.4	2.7	1.8	1.4	0.31	0.21	0.16	0.13				
	20 UC	0.11	14	8.2	6.5	5.4	4.1	3.3	2.2	1.6	0.37	0.25	0.19	0.15				
	30 UC	0.13	17	9.7	7.7	6.4	4.8	3.9	3.2	2.6	1.9	0.44	0.29	0.22				
	40 UC	0.15	19	11.1	8.9	7.4	5.6	4.5	3.7	3.0	2.2	0.51	0.34	0.26				
	50 UC	0.17	22	12.6	10.1	8.4	6.3	5.0	4.2	3.4	2.5	0.58	0.39	0.29				
TTI11002 (50)	15 UC	0.18	23	13.4	10.7	8.9	6.7	5.3	4.5	3.6	2.7	0.61	0.41	0.31				
	20 UC	0.20	26	14.9	11.9	9.9	7.4	5.9	5.0	4.0	3.0	0.68	0.45	0.34				
	30 UC	0.22	28	16.3	13.1	10.9	8.2	6.5	5.4	4.4	3.3	0.75	0.50	0.37				
	40 UC	0.24	31	17.8	14.3	11.9	8.9	7.1	5.9	4.8	3.6	0.82	0.54	0.41				
	50 UC	0.26	33	19.3	15.4	12.9	9.7	7.7	6.4	5.1	3.9	0.88	0.59	0.44				
TTI110025 (50)	15 UC	0.28	36	21	16.6	13.9	10.4	8.3	6.9	5.5	4.2	0.95	0.63	0.48				
	20 UC	0.30	38	22	17.8	14.9	11.1	8.9	7.4	5.9	4.5	1.0	0.68	0.51				
	30 UC	0.32	41	24	19.0	15.8	11.9	9.5	7.6	6.3	4.8	1.1	0.73	0.54				
	40 UC	0.34	44	25	20.4	16.8	12.6	10.1	8.4	7.2	5.6	1.2	0.79	0.60				
	50 UC	0.36	46	26	21.8	17.8	13.6	10.4	8.7	7.5	5.6	1.3	0.86	0.65				
TTI11003 (50)	15 UC	0.37	47	27	22	18.3	13.7	10.4	8.7	7.2	5.6	1.4	0.91	0.68				
	20 UC	0.38	49	28	23	18.8	14.1	11.3	9.2	7.7	6.1	1.5	1.0	0.77				
	30 UC	0.40	51	30	24	19.8	14.9	11.9	9.9	7.9	5.9	1.4	0.91	0.68				
	40 UC	0.42	54	31	25	21	15.6	12.5	10.4	8.3	6.2	1.4	0.95	0.71				
	50 UC	0.45	58	33	27	22	16.7	13.4	10.6	8.7	6.7	1.5	1.0	0.77				
TTI11004 (50)	15 UC	0.47	60	35	28	23	17.4	14.0	11.6	9.3	7.0	1.6	1.1	0.80				
	20 UC	0.49	63	36	29	24	18.3	14.6	12.1	9.7	7.3	1.7	1.1	0.83				
	30 UC	0.51	65	37	31	25	19.3	15.4	12.9	10.3	7.7	1.8	1.2	0.88				
	40 UC	0.53	68	39	31	26	20.2	16.3	13.1	10.5	7.9	1.8	1.2	0.90				
	50 UC	0.55	70	40	32	27	21.1	17.2	13.9	11.3	8.5	1.9	1.3	0.97				
TTI11005 (50)	15 UC	0.57	72	42	34	28	21	17.6	14.9	11.9	8.9	2.0	1.4	1.0				
	20 UC	0.60	77	45	36	30	22	18.6	14.9	11.9	8.9	2.0	1.4	1.0				
	30 UC	0.63	81	47	37	31	23	19.6	15.6	12.5	9.4	2.1	1.4	1.1				
	40 UC	0.66	84	49	39	33	25	19.6	16.3	13.1	9.8	2.2	1.5	1.1				
	50 UC	0.69	88	51	41	34	26	20	17.1	11.3	8.5	1.9	1.3	0.97				
TTI11006 (50)	15 UC	0.69	88	51	41	34	26	20	17.1	11.3	8.5	1.9	1.3	0.97				
	20 UC	0.71	91	53	42	35	27	21	17.6	14.1	10.5	2.4	1.6	1.2				
	30 UC	0.73	93	54	43	36	27	22	18.1	14.5	10.8	2.5	1.7	1.2				
	40 UC	0.75	96	56	45	37	28	22	18.6	14.9	11.1	2.6	1.7	1.3				
	50 UC	0.79	101	59	47	39	29	23	19.6	15.6	11.7	2.7	1.8	1.3				
TTI11008 (50)	15 UC	0.82	106	63	50	42	40	32	21	17.6	14.9	11.9	8.9	2.0				
	20 UC	0.85	109	65	50	42	40	32	21	17.6	14.9	11.9	8.9	2.0				
	30 UC	0.89	114	66	53	44	33	26	22	17.6	14.9	11.9	8.9	2.0				
	40 UC	0.98	125	73	58	49	36	29	24	19.4	14.6	13.0	2.2	1.7				
	50 UC	1.06	136	79	63	52	39	32	26	21.6	16.6	14.6	2.4	1.8				
TTI11010	15 UC	1.13	144	84	67	56	42	34	28	22	16.8	3.8	2.6	1.9				
	20 UC	1.20	154	89	71	59	45	36	30	24	17.8	4.1	2.7	2.0				
	30 UC	1.26	161	94	75	62	52	37	31	25	18.7	4.4	2.7	2.1				
	40 UC	1.32	169	98	78	65	55	42	33	26	19.6	4.5	3.0	2.2				
	50 UC	1.41	180	105	84	70	62	45	36	30	22	4.8	3.2	2.4				
60 UC	1.50	192	111	89	74	65	47	37	30	22	5.1	3.4	2.6					
80 UC	1.58	202	117	94	78	59	45	37	31	23	5.4	3.6	2.7					

CONTACT PRODUCT	SYSTEMIC PRODUCT	DRIFT MANAGEMENT
-	EXCELLENT	EXCELLENT

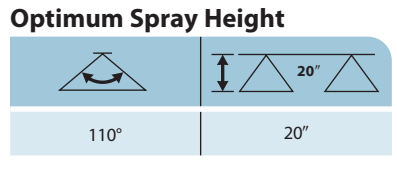

How to order:
 Specify tip number.
 Example:
 TTI11004-VP - Polymer with VisiFlo® color-coding
 TTI11003-VP-CE - Polymer with VisiFlo color-coding, includes Quick TeeJet cap and gasket

NEW!
 TTI11008 (50)
NEW!
 TTI11010

Note: Always double check your application rates. Tabulations are based on spraying water at 70°F (21°C).