

*Always verify tips or orifices you received are the size which you require before using with chemical. Chemical rates need to be obtained from your chemical dealer.

AI TeeJet® Air Induction Even Flat Spray Tips

EVEN SPRAY

Features:

- Available with stainless steel insert, polymer holder and pre-orifice with VisiFlo® color coding.
- Larger droplets for less drift.
- Depending on the chemical, produces large air-filled drops through the use of a Venturi air aspirator.
- Ideal for banding over the row or in row middles.
- Automatic spray alignment with 25598*-NYR Quick TeeJet cap and gasket.

AI TEEJET - EVEN	
PART NO.	LIST PRICE
AI95##-EVS.....	\$16.33
## - Specify Tip Size	
VS - Stainless Steel w/ VisiFlo® Color Coding	
REQUIRED CAP	
25598*-NYR(current style).....	\$1.41
114443*-NYR(new style).....	\$1.41
* - Specify Cap Color	
NOTE TeeJet will begin transitioning to a "new" cap lineup. Old style caps are still available and will ship until current inventory is gone.	



CATALOG IS LIST PRICE PLEASE APPLY DISCOUNT




Note: Due to the pre-orifice design, this tip is not compatible with the 4193A check valve tip strainer.



TIPO	PSI	DROP SIZE	CAPACITY ONE NOZZLE IN GPM	CAPACITY ONE NOZZLE IN OZ./MIN.	GPA \triangle 30" \triangle Field Acres											
					3 MPH	3.5 MPH	4 MPH	4.5 MPH	5 MPH	5.5 MPH	6 MPH	6.5 MPH	7 MPH	7.5 MPH	8 MPH	8.5 MPH
					UC	XC	VC	VC	VC	VC	VC	VC	VC	VC	VC	VC
AI95015EVS (100)	30	UC	0.13	17	8.6	7.4	6.4	5.7	5.1	4.7	4.3	4.0	3.7	3.4	3.2	3.0
	40	XC	0.15	19	9.9	8.5	7.4	6.6	5.9	5.4	5.0	4.6	4.2	4.0	3.7	3.5
	50	XC	0.17	22	11.2	9.6	8.4	7.5	6.7	6.1	5.6	5.2	4.8	4.5	4.2	4.0
	60	VC	0.18	23	11.9	10.2	8.9	7.9	7.1	6.5	5.9	5.5	5.1	4.8	4.5	4.2
	70	VC	0.20	26	13.2	11.3	9.9	8.8	7.9	7.2	6.6	6.1	5.7	5.3	5.0	4.7
	80	VC	0.21	27	13.9	11.9	10.4	9.2	8.3	7.6	6.9	6.4	5.9	5.5	5.2	4.9
AI9502EVS (50)	30	UC	0.17	22	11.2	9.6	8.4	7.5	6.7	6.1	5.6	5.2	4.8	4.5	4.2	4.0
	40	XC	0.20	26	13.2	11.3	9.9	8.8	7.9	7.2	6.6	6.1	5.7	5.3	5.0	4.7
	50	XC	0.22	28	14.5	12.4	10.9	9.7	8.7	7.9	7.3	6.7	6.2	5.8	5.4	5.1
	60	VC	0.24	31	15.8	13.6	11.9	10.6	9.5	8.6	7.9	7.3	6.8	6.3	5.9	5.6
	70	VC	0.26	33	17.2	14.7	12.9	11.4	10.3	9.4	8.6	7.9	7.4	6.9	6.4	6.1
	80	VC	0.28	36	18.5	15.8	13.9	12.3	11.1	10.1	9.2	8.5	7.9	7.4	6.9	6.5
AI95025EVS (50)	30	UC	0.22	28	14.5	12.4	10.9	9.7	8.7	7.9	7.3	6.7	6.2	5.8	5.4	5.1
	40	XC	0.25	32	16.5	14.1	12.4	11.0	9.9	9.0	8.3	7.6	7.1	6.6	6.2	5.8
	50	XC	0.28	36	18.5	15.8	13.9	12.3	11.1	10.1	9.2	8.5	7.9	7.4	6.9	6.5
	60	VC	0.31	40	20	17.5	15.3	13.6	12.3	11.2	10.2	9.4	8.8	8.2	7.7	7.2
	70	VC	0.33	42	22	18.7	16.3	14.5	13.1	11.9	10.9	10.1	9.3	8.7	8.2	7.7
	80	VC	0.35	45	23	19.8	17.3	15.4	13.9	12.6	11.6	10.7	9.9	9.2	8.7	8.2
AI9503EVS (50)	30	UC	0.26	33	17.2	14.7	12.9	11.4	10.3	9.4	8.6	7.9	7.4	6.9	6.4	6.1
	40	XC	0.30	38	19.8	17.0	14.9	13.2	11.9	10.8	9.9	9.1	8.5	7.9	7.4	7.0
	50	XC	0.34	44	22	19.2	16.8	15.0	13.5	12.2	11.2	10.4	9.6	9.0	8.4	7.9
	60	VC	0.37	47	24	21	18.3	16.3	14.7	13.3	12.2	11.3	10.5	9.8	9.2	8.6
	70	VC	0.40	51	26	23	19.8	17.6	15.8	14.4	13.2	12.2	11.3	10.6	9.9	9.3
	80	VC	0.42	54	28	24	21	18.5	16.6	15.1	13.9	12.8	11.9	11.1	10.4	9.8
AI9504EVS (50)	30	UC	0.35	45	23	19.8	17.3	15.4	13.9	12.6	11.6	10.7	9.9	9.2	8.7	8.2
	40	XC	0.40	51	26	23	19.8	17.6	15.8	14.4	13.2	12.2	11.3	10.6	9.9	9.3
	50	XC	0.45	58	30	25	22	19.8	17.8	16.2	14.9	13.7	12.7	11.9	11.1	10.5
	60	VC	0.49	63	32	28	24	22	19.4	17.6	16.2	14.9	13.9	12.9	12.1	11.4
	70	VC	0.53	68	35	30	26	23	21	19.1	17.5	16.1	15.0	14.0	13.1	12.3
	80	VC	0.57	73	38	32	28	25	23	21	18.8	17.4	16.1	15.0	14.1	13.3
AI9505EVS (50)	30	UC	0.43	55	28	24	21	18.9	17.0	15.5	14.2	13.1	12.2	11.4	10.6	10.0
	40	XC	0.50	64	33	28	25	22	19.8	18.0	16.5	15.2	14.1	13.2	12.4	11.6
	50	XC	0.56	72	37	32	28	25	22	20	18.5	17.1	15.8	14.8	13.9	13.0
	60	VC	0.61	78	40	35	30	27	24	22	20	18.6	17.3	16.1	15.1	14.2
	70	VC	0.66	84	44	37	33	29	26	24	22	20	18.7	17.4	16.3	15.4
	80	VC	0.71	91	47	40	35	31	28	26	23	22	20	18.7	17.6	16.5
AI9506EVS (50)	30	UC	0.52	67	34	29	26	23	21	18.7	17.2	15.8	14.7	13.7	12.9	12.1
	40	UC	0.60	77	40	34	30	26	24	22	19.8	18.3	17.0	15.8	14.9	14.0
	50	XC	0.67	86	44	38	33	29	27	24	22	20	19.0	17.7	16.6	15.6
	60	XC	0.73	93	48	41	36	32	29	26	24	22	21	19.3	18.1	17.0
	70	XC	0.79	101	52	45	39	35	31	28	26	24	22	21	19.6	18.4
	80	VC	0.85	109	56	48	42	37	34	31	28	26	24	22	21	19.8
AI9508EVS (50)	30	UC	0.69	88	46	39	34	30	27	25	23	21	19.5	18.2	17.1	16.1
	40	UC	0.80	102	53	45	40	35	32	29	26	24	23	21	19.8	18.6
	50	XC	0.89	114	59	50	44	39	35	32	29	27	25	23	22	21
	60	XC	0.98	125	65	55	49	43	39	35	32	30	28	26	24	23
	70	XC	1.06	136	70	60	52	47	42	38	35	32	30	28	26	25
	80	VC	1.13	145	75	64	56	50	45	41	37	34	32	30	28	26
AI9508EVS (50)	90	VC	1.20	154	79	68	59	53	48	43	40	37	34	32	30	28
	100	VC	1.26	161	83	71	62	55	50	45	42	38	36	33	31	29

CONTACT PRODUCT	SYSTEMIC PRODUCT	DRIFT MANAGEMENT
GOOD	EXCELLENT	EXCELLENT

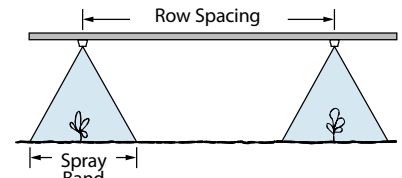

TIPO	95°	GPA CONVERSION FACTORS*	
		20"	30"
8"	4"	2.50	3.75
10"	5"	2.00	3.00
12"	5"	1.67	2.50
15"	7"	1.33	2.00

*To find GPA rate on band widths, multiply the tabulated GPA for ROW SPACING by conversion factors.

How to order:

Specify tip number.

Example:

AI9504EVS – Stainless Steel with VisiFlo color-coding

Note: Always double check your application rates. Tabulations are based on spraying water at 70°F (21°C).